


## LF-A1-075H105A/C

Programmable IP67 Isolated LED Driver | Constant Current - Dimmable

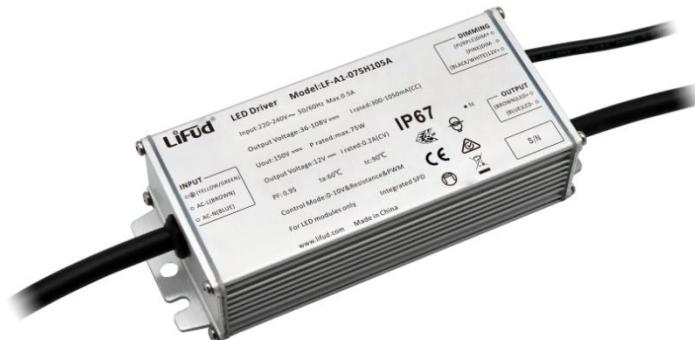

### Product family features

- 3-in-1 dimming + time dimming+12V AUX output (A version), 3-in-1 dimming + time dimming (C version)
- Low THD<10% @60% load, 230Vac
- Rated input voltage: 220-240Vac
- $T_a: -40\text{~}+60^\circ\text{C}$
- Ripple current <3%
- Standby power consumption $\leq 0.5\text{W}$
- All-round protections: short circuit, open circuit, over-temperature
- IP67, suitable for Class I light fixtures
- 5 years guarantee

### Product family benefits

- High efficiency
- Flicker free
- Long lifetime and high reliability
- Isolated

### Typical applications

- For shoebox lights, flood lights, street lights and tunnel lights
- For street lighting

### Product parameters

— Output current 300-1050mA	— Output voltage 36-108Vdc
— Output power 10.8-75W	— Efficiency 92%
— Input voltage 180-264Vac	

## Electrical data

### Input data

<b>Rated AC input voltage</b>	220 ... 240V
<b>AC voltage range</b>	180 ... 264V
<b>Mains frequency</b>	50Hz
<b>Rated DC input voltage</b>	310 ... 340V
<b>DC voltage range</b>	254 ... 340V
<b>Power factor</b>	$\geq 0.95/230V_{ac}@full\ load$
<b>Current tolerance</b>	$I_o \geq 600mA \pm 5\%; < 600mA \pm 7\%$
<b>Linear adjustment rate</b>	$\pm 5\% @full\ load$
<b>Load adjustment rate</b>	$V_o: 50-108V_{dc} \pm 5\%; 36-108V_{dc} \pm 7\%$
<b>Efficiency</b>	91% <sup>1)</sup>
<b>Input current</b>	0.5A Max
<b>Inrush current</b>	80A <sup>2)</sup>
<b>Loading number on circuit breaker 10 A (B)</b>	12PCS @230V <sub>ac</sub> $\pm 10\%$
<b>Loading number on circuit breaker 10 A (C)</b>	17PCS @230V <sub>ac</sub> $\pm 10\%$
<b>Loading number on circuit breaker 16 A (B)</b>	20PCS @230V <sub>ac</sub> $\pm 10\%$
<b>Loading number on circuit breaker 16 A (C)</b>	28PCS @230V <sub>ac</sub> $\pm 10\%$
<b>Leakage current</b>	$\leq 0.7mA$
<b>Standby power consumption</b>	$\leq 0.5W @220V_{ac}/50Hz$ Dim to off

### Output data

<b>Nominal output voltage</b>	36 ... 108V
<b>Nominal output current</b>	300 ... 1050mA
<b>Default output current</b>	700mA $\pm 5\%$
<b>Current setting</b>	Programming
<b>Maximum output power</b>	75W Max@220-240V <sub>ac</sub>
<b>Nominal output power</b>	10.8 ... 75W
<b>Output ripple current</b>	<3%@ $\leq 120Hz$
<b>Flicker</b>	According to IEEE Std 1789-2015
<b>CIE SVM</b>	$\leq 0.4$
<b>IEC-Pst</b>	$\leq 1$
<b>Temperature tolerance</b>	$\pm 10\% @25^{\circ}C \sim 60^{\circ}C$
<b>Start-up time</b>	230V <sub>ac</sub> <0.5S@full load
<b>THD</b>	$\leq 10\% @60\% load$ Single harmonic: harmonic-C $\geq 60\% load/230V_{ac}$
<b>Device power loss</b>	/

### 12V AUX





<b>Output voltage</b>	+12V <sub>dc</sub> (11-14V)
<b>Output current</b>	200mA max.
<b>Dynamic load</b>	Please make sure that it matches the LED driver
<b>Ripple voltage</b>	$\leq 1V$

## Safety


<b>Withstanding voltage</b>	I/P-O/P, I/P-DIM: 3.15kV&5mA&60S; I/P-PE, DIM-PE, DIM-O/P: 1.5kV&5mA&60S; O/P-PE : 0.5kV&5mA&60S
<b>Surge capability (L-N)</b>	6 kV (2Ω)
<b>Surge capability (L/N-Ground)</b>	10 kV (12Ω)
<b>Insulation resistance</b>	I/P-PE, I/P-O/P, O/P-PE, I/P-DIM, O/P-DIM, DIM-PE: >100MΩ@500Vdc
<b>Guarantee</b>	5 years <sup>3)</sup>

1) @output current 700mA, output voltage 108V, @230Vac  
 2)  $t = 350\mu\text{s}$   
 3) 5 years @ $T_{\text{c}} \leq 80^\circ\text{C}$


## Characteristic diagrams

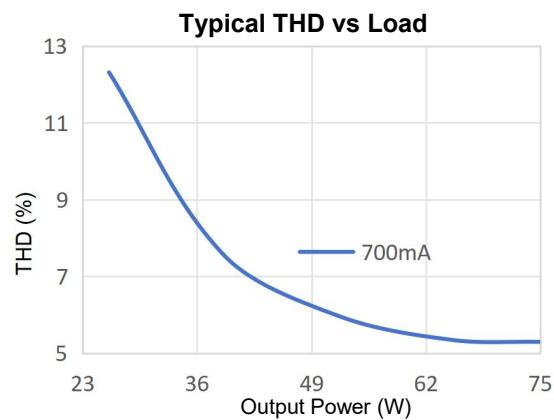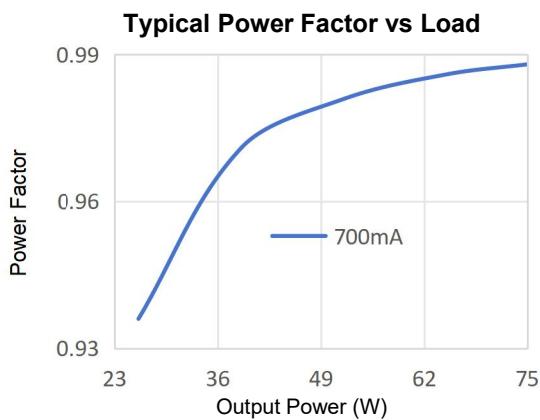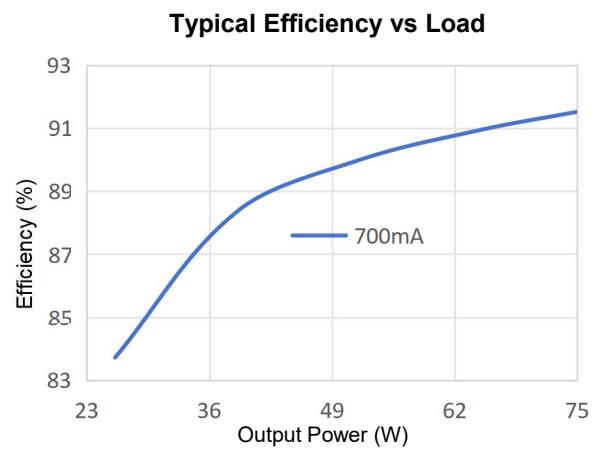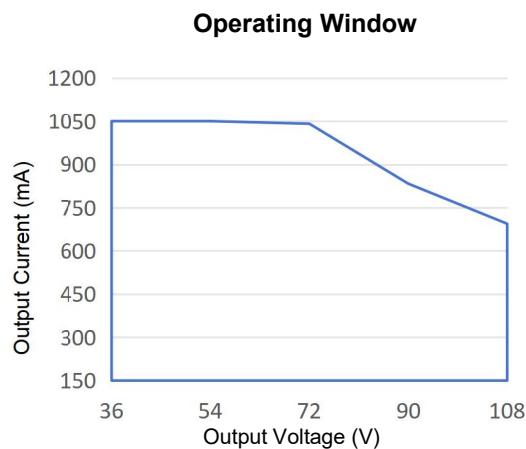

## Load Derating Curve

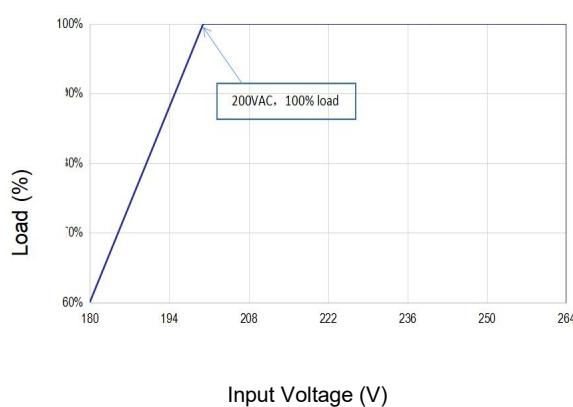

## Lifespan

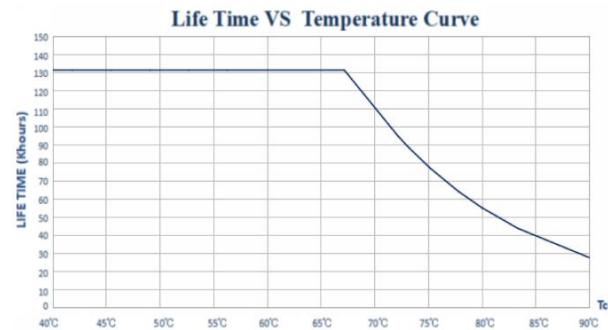

Note: input: 230Vac/50Hz, output: 71.4Vdc/1050mA (only for reference)


## Dimming operation instructions

Parameter	Min.	Typ.	Max.	Note
Output current	300mA	700mA	1050mA	Total output power ≤75W

### 0-10V Dimming Operation


- Connect 0-10V signal to DIM terminal.
- In 0-10V dimming mode, when the input voltage is  $0.8V \pm 0.15$ , the light turns off; when it's  $1.0V \pm 0.15$ , the light turns on.
- Dimming depth: 10% (typical value)
- DIM+/- (without signal connected): 100% rated current output

### Wiring Diagram of 0-10V Dimming

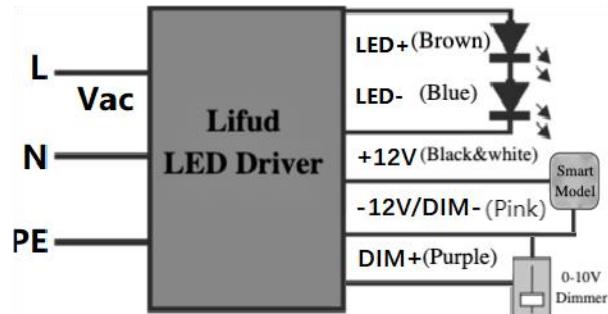

This diagram is only for A version; C version has no 12V+.

### Dimming Curve

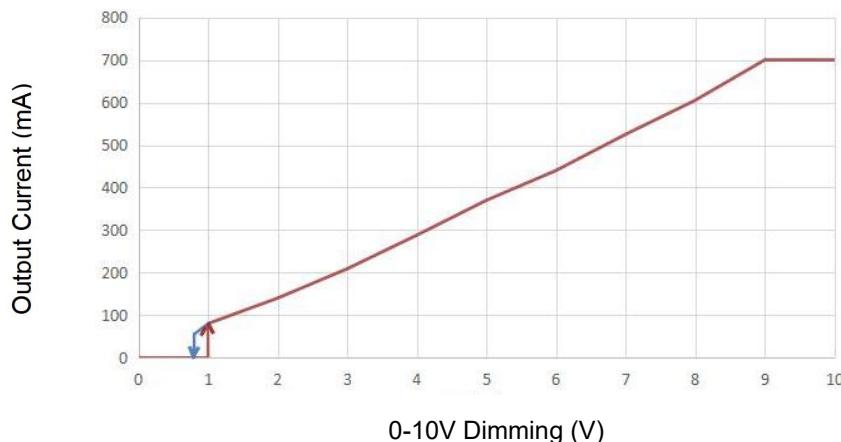


Input: 230Vac; output: 108Vdc/700mA (this data is measured by Lifud 0-10V dimmer and the chart is for reference only)

### PWM Dimming Operation


- Connect PWM signal to the DIM terminal.
- Dimming depth: 10% (typical value)
- Compatible signal range: 1000-2000(Hz), amplitude: 9-10(V)
- DIM+/- (without signal connected): 100% rated current

### Wiring Diagram of PWM Dimming

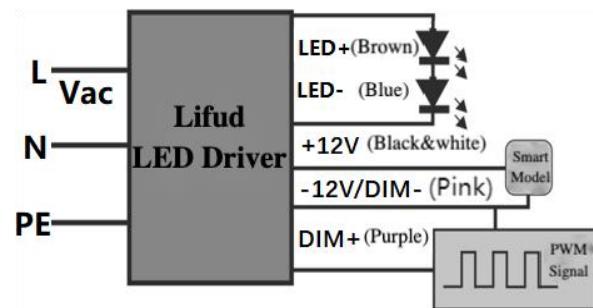

This diagram is only for A version; C version has no 12V+.

### Dimming Curve

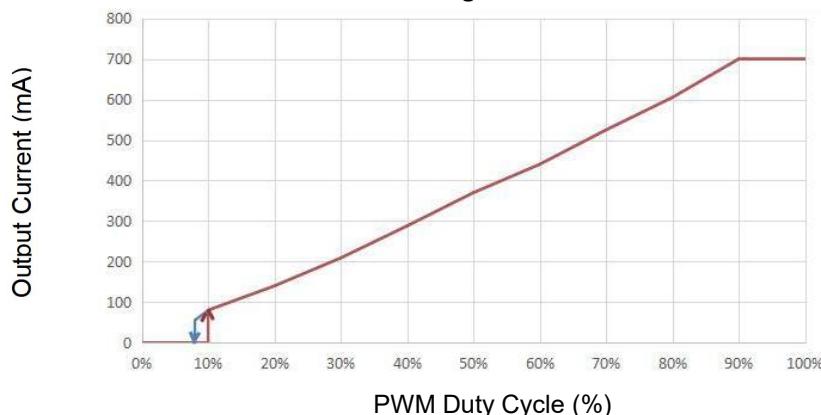


Input: 230Vac; output: 108Vdc/700mA (this data is measured by Lifud PWM signal generator Tektronix and the chart is for reference only)

### Rx Dimming Operation


- Connect Rx signal to the DIM terminal.
- Range: 0-100KΩ
- Dimming depth: 10% (typical value)
- DIM+/- (without signal connected): 100% rated current

### Wiring Diagram of Rx Dimming

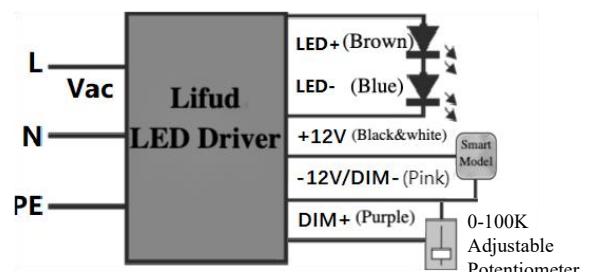

This diagram is only for A version; C version has no 12V+.

### Dimming Curve

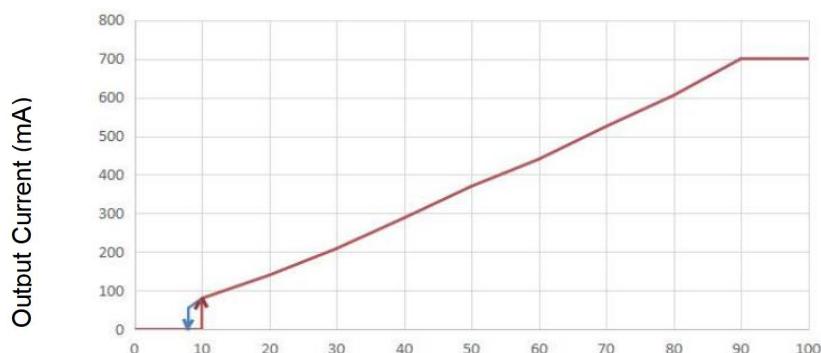


### Rx Resistance (KΩ)

Input: 230Vac; output: 108Vdc/700mA (this data is measured by resistance dimmer and the chart is for reference only)

## Programmer tools and software


Product	Name	Brand	Model	Software
	Lifud programmer	LIFUD	LF-SCS080C	LF-PRG

## Wiring diagram of parameter setting

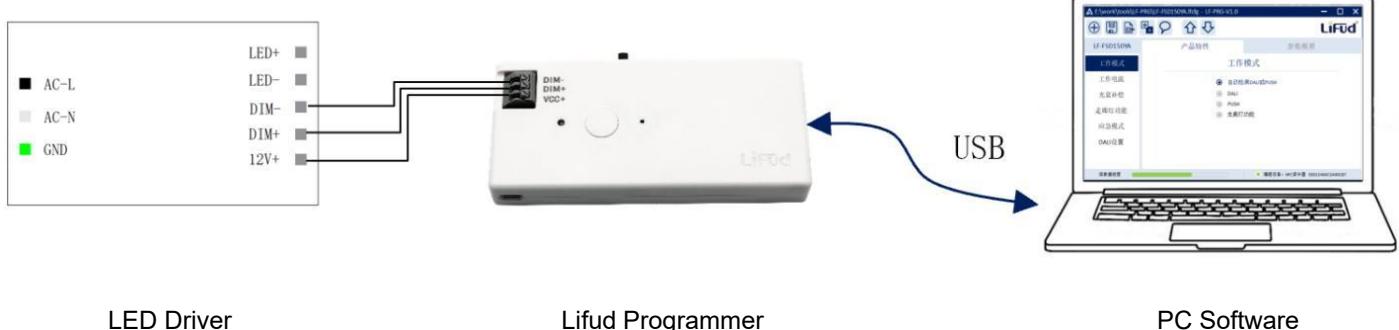


## Time dimming function

Time dimming mode: there are 6 steps in total. You can set the brightness of each step and the operating time of the first to fifth steps.

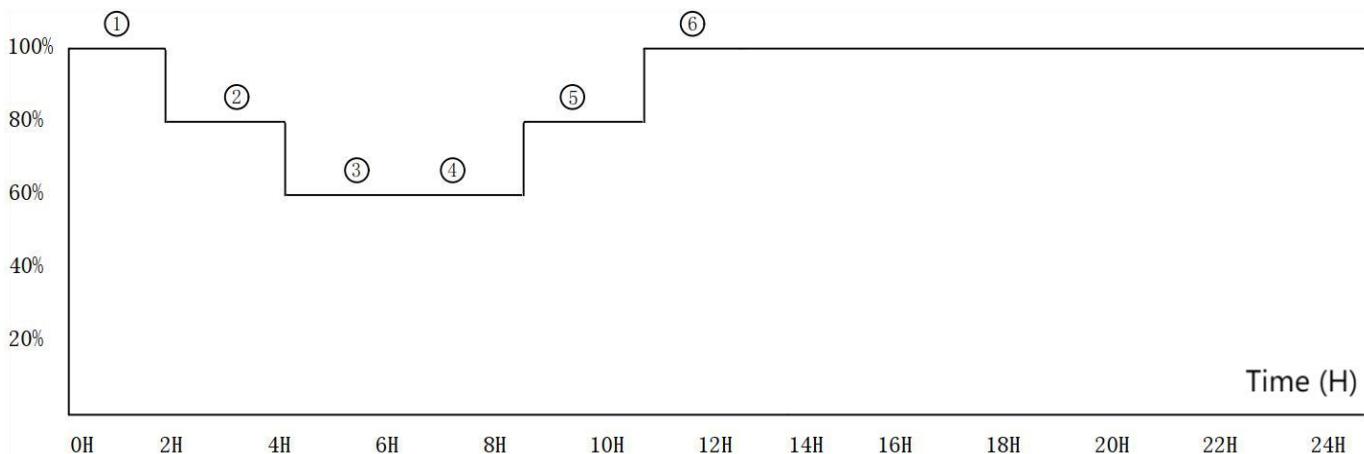

Note: In the time dimming mode, after the LED driver is powered on, it will work according to the set dimming curve.

## Dimensions

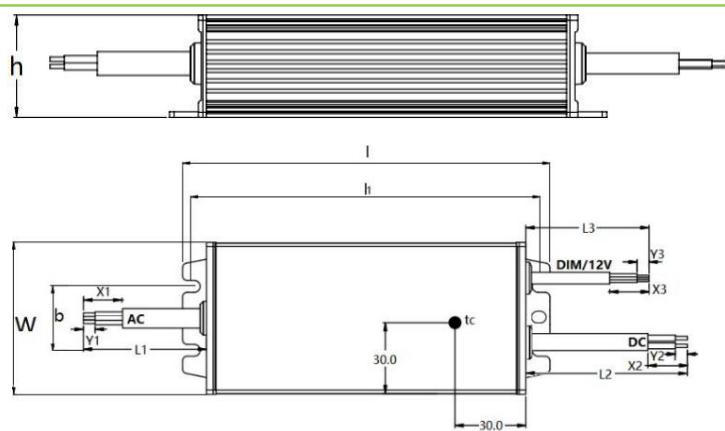

Note: this diagram is a front view and Tc point is on the front side of the LED driver.

<b>Mounting hole spacing, length(l1)</b>	145.6mm
<b>Mounting hole spacing, width(b)</b>	27mm
<b>Product weight</b>	630g
<b>Wire type, input side</b>	3*1.0mm <sup>2</sup> $\phi$ 8.2±1mm
<b>Wire type, output side</b>	2*1.0mm <sup>2</sup> $\phi$ 7.7±1mm
<b>Wire type, dimming and AUX side</b>	3*22AWG $\phi$ 5.0±0.2mm
<b>Wire color, input side</b>	AC-L Brown; AC-N Blue; PE Yellow&green
<b>Wire color, output side</b>	LED+ Brown; LED- Blue
<b>Wire color, dimming and AUX side (only for A version, C version has no 12V wires)</b>	DIM+ Purple; DIM- Pink; +12V Black&white
<b>Wire length, input side (L1)</b>	300±10mm
<b>Wire length, output side (L2)</b>	230±10mm
<b>Wire length, dimming and AUX side (L3)</b>	230±10mm
<b>Wire peeled length, input side (X1)</b>	40±4mm
<b>Wire peeled length, output side (X2)</b>	36±4mm
<b>Wire peeled length, dimming and AUX side (X3)</b>	60±5mm
<b>Wire tinned length, input side (Y1)</b>	10±1.5mm
<b>Wire tinned length, output side (Y2)</b>	8±1.5mm
<b>Wire tinned length, dimming and AUX side (Y3)</b>	10±1.5mm
<b>Length (l)</b>	155.6±0.5mm
<b>Width (w)</b>	64.2±0.5mm
<b>Height (h)</b>	35.5±0.5mm

### Colors & materials

<b>Casing material</b>	Metal
<b>Casing color</b>	Silver gray

### Temperature & operating conditions

<b>Ambient temperature range</b>	-40°C - +60°C
<b>Maximum temperature at Tc test point</b>	90°C
<b>Temperature range at storage</b>	-40°C - +80°C (6 months in Class I environment)
<b>Humidity range at storage</b>	10-90%RH (no condensation)
<b>Humidity during operation</b>	20-90%RH
<b>Atmospheric pressure</b>	86-106KPa
<b>RoHS</b>	RoHS 2.0 (EU) 2015/863

## Capabilities

<b>Dimmable</b>	0-10V/PWM/Rx dimmable
<b>Open circuit protection</b>	Open circuit voltage $\leq$ 150Vdc
<b>Over-temperature protection</b>	When $T_c$ is $95^{\circ}\text{C} \pm 5^{\circ}\text{C}$ , it will reduce the current and auto-recover when the $T_c$ decreases to the normal temperature.
<b>Overload protection</b>	/
<b>Short circuit protection</b>	The LED driver will not be damaged even in the state of short circuit for a long time. (Auto-recovery)
<b>Max. cable length to lamp/LED module</b>	/
<b>Suitable for fixtures with prot. class</b>	I
<b>Control interface</b>	/
<b>Number of channels</b>	1 channel

## Programming

<b>Programmer</b>	LF-SCS080C
<b>DALI control software</b>	/
<b>APP</b>	LF-PRG

## Certificates & standards

<b>Approval marks – approval</b>	ENEC, CE, CB, RCM, SAA
<b>Standards</b>	IEC/EN 61347-2-13, IEC/EN 61347-1, IEC/EN 62493
	IEC/EN 62384, AS 61347.1, AS 61347.2.13
<b>EMC</b>	EN 55015, EN 61547, EN 61000-3-2,3
<b>Group pulse</b>	5kV (Class B)
<b>ESD</b>	Air 8kV, touch 4kV
<b>Type of protection</b>	IP67

## Logistical data

<b>Product</b>	<b>Packaging unit</b>	<b>Dimensions (L*W*H)</b>	<b>Volume</b>	<b>Gross weight</b>
	<b>(Pieces/Unit)</b>			
LF-A1-075H105A/C	16	446 mm*332mm*167mm	24.73 dm <sup>3</sup>	11.58kg $\pm$ 5%

## Test equipment & condition

<b>Test equipment</b>	AC power source: CHROMA6530, digital power meter: CHROMA66205, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber; lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, EEC SE7440, flicker tester (flicker-free coefficient test) Everfine LFA-3000, etc.
-----------------------	---

---

If there are no special remarks, the above parameters are tested at the ambient temperature of 25°C, humidity of 50%, maximum output power and input voltage of 230Vac/50Hz.

---

## Additional information

1. It is recommended that user install the over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.
2. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.
3. The number of LED drivers that can be connected to a circuit breaker and the inrush current are tested under the same conditions.
4. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.
5. When using the LED driver, please pay attention that the total output power should not exceed the maximum rated output power, otherwise the warranty service of LED driver will fail.
6. When conducting withstanding voltage test on LED driver, please short-circuit the input wire L and N; the positive electrode and negative electrode of the output wire; the positive electrode and negative electrode of the dimming wire and AUX power supply.

## Transportation & storage

Suitable transportation means: vehicles, boats and aeroplanes.

In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact on LED driver as much as possible.

The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

## Cautions

Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.

Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.

Man-made damage is beyond the scope of Lifud warranty service.

## Disclaimer

Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.

Lifud Technology Co., Ltd. reserves the right to interpret any content of this specification.