

LF-A1-150H105A/C

Programmable IP67 Isolated LED Driver | Constant Current - Dimmable



Product family features

- 3-in-1 dimming + time dimming+12V AUX output (A version), 3-in-1 dimming + time dimming (C version)
- Low THD<10% @60% load, 230Vac
- Rated input voltage: 220-240Vac
- $T_a: -40\text{~}+60^\circ\text{C}$
- Ripple current <3%
- Standby power consumption $\leq 0.5\text{W}$
- All-round protections: short circuit, open circuit, over-temperature
- IP67, suitable for Class I light fixtures
- 5 years guarantee

Product family benefits

- High efficiency
- Flicker free
- Long lifetime and high reliability
- Isolated

Typical applications

- For shoebox lights, flood lights, street lights and tunnel lights
- For street lighting

Product parameters

— Output current 300-1050mA	— Output voltage 72-214Vdc
— Output power 21.6-150W	— Efficiency 93%
— Input voltage 180-264Vac	

Electrical data

Input data

Rated AC input voltage	220 ... 240V
AC voltage range	180 ... 264V
Mains frequency	50Hz
Rated DC input voltage	310 ... 340V
DC voltage range	254 ... 340V
Power factor	$\geq 0.95/230V_{ac}$ @full load
Current tolerance	$I_o \geq 600mA \pm 5\%$; $< 600mA \pm 35mA$
Linear adjustment rate	$\pm 5\%$ @full load
Load adjustment rate	$V_o: 100-214V_{dc} \pm 5\%$; $72-214V_{dc} \pm 7\%$
Efficiency	92% ¹⁾
Input current	0.8A Max
Inrush current	80A ²⁾
Loading number on circuit breaker 10 A (B)	5PCS @230V _{ac} $\pm 10\%$
Loading number on circuit breaker 10 A (C)	9PCS @230V _{ac} $\pm 10\%$
Loading number on circuit breaker 16 A (B)	9PCS @230V _{ac} $\pm 10\%$
Loading number on circuit breaker 16 A (C)	14PCS @230V _{ac} $\pm 10\%$
Leakage current	$\leq 0.7mA$
Standby power consumption	$\leq 0.5W$ @220V _{ac} /50Hz Dim to off

Output data

Nominal output voltage	72 ... 214V
Nominal output current	300 ... 1050mA
Default output current	700mA
Current setting	Programming
Maximum output power	150W Max@220-240V _{ac}
Nominal output power	21.6 ... 150W
Output ripple current	<3%@ $\leq 120Hz$
Flicker	According to IEEE Std 1789-2015
CIE SVM	≤ 0.4
IEC-Pst	≤ 1
Temperature tolerance	$\pm 10\%$ @ $25^{\circ}C \sim 60^{\circ}C$
Start-up time	230V _{ac} $< 0.5S$ @full load
THD	$\leq 10\%$ @60% load Single harmonic: harmonic-C $\geq 60\%$ load/230V _{ac}
Device power loss	/

12V AUX





Output voltage	+12V _{dc} (11-14V)
Output current	200mA max.
Dynamic load	Please make sure that it matches the LED driver.
Ripple voltage	$\leq 1V$

Safety


Withstanding voltage	I/P-O/P, I/P-DIM: 3.15kV&5mA&60S; I/P-PE, DIM-PE, DIM-O/P: 1.5kV&5mA&60S; O/P-PE : 0.5kV&5mA&60S
Surge capability (L-N)	6 kV (2Ω)
Surge capability (L/N-Ground)	10 kV (12Ω)
Insulation resistance	I/P-PE, I/P-O/P, O/P-PE, I/P-DIM, O/P-DIM, DIM-PE: >100MΩ@500Vdc
Guarantee	5 years ³⁾

1) @output current 700mA, output voltage 214V, @230Vac
 2) t =350μs
 3) 5 years @Tc≤85°C


Characteristic diagrams

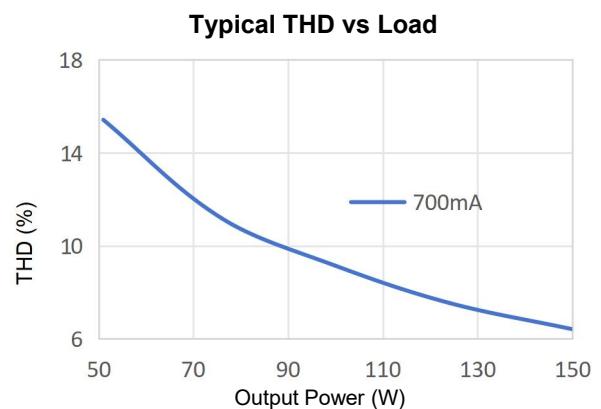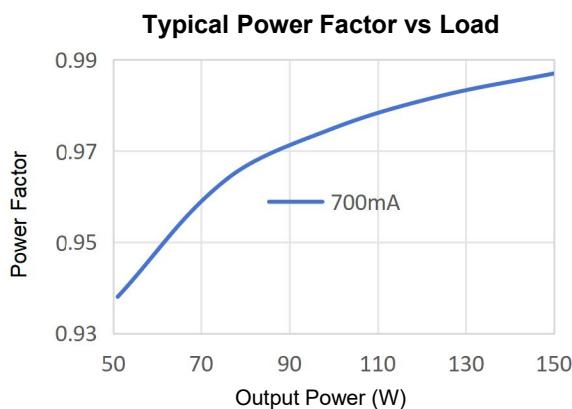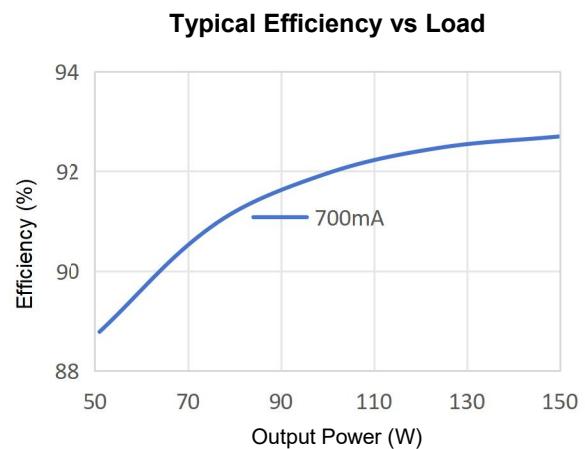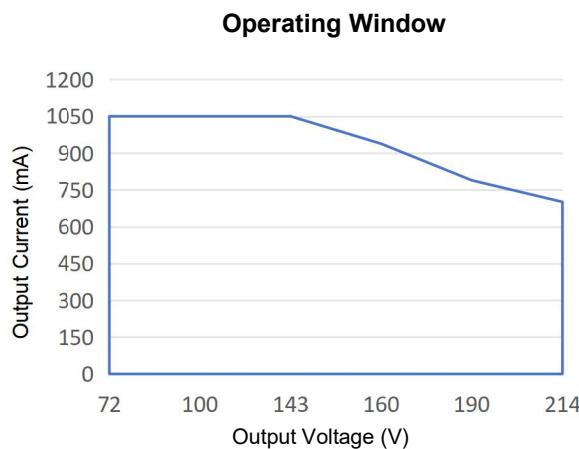

Load Derating Curve

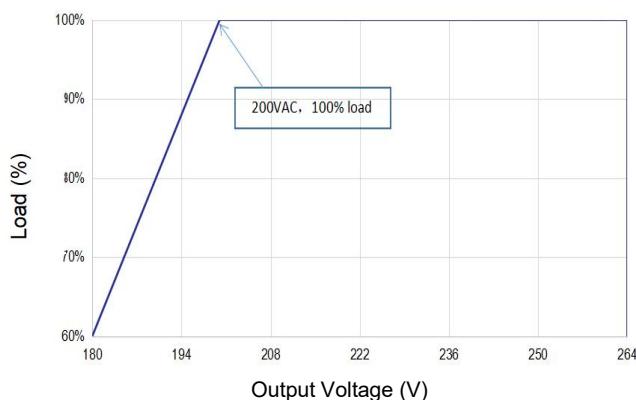

Lifespan

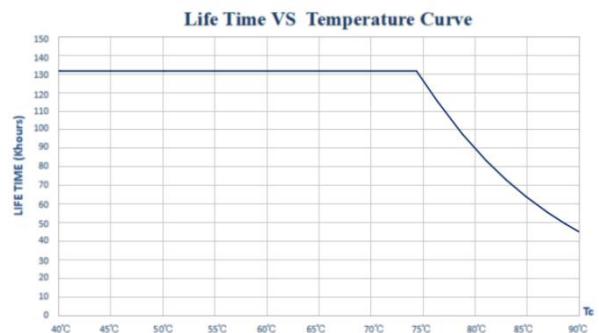

Note: input: 230Vac/50Hz, output: 214Vdc/700mA (only for reference)


Dimming operation instructions

Parameter	Min.	Typ.	Max.	Note
Output current	300mA	700mA	1050mA	Total output power ≤150W

0-10V Dimming Operation


- Connect 0-10V signal to DIM terminal.
- In 0-10V dimming mode, when the input voltage is $0.8V \pm 0.15$, the light turns off; when it's $1.0V \pm 0.15$, the light turns on.
- Dimming depth: 10% (typical value)
- DIM+/- (without signal connected): 100% rated current output

Wiring Diagram of 0-10V Dimming

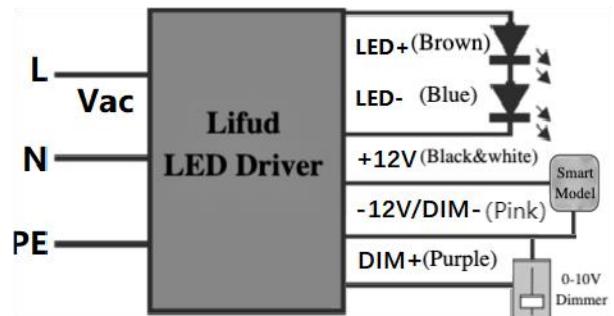

This diagram is only for A version; C version has no 12V+.

Dimming Curve

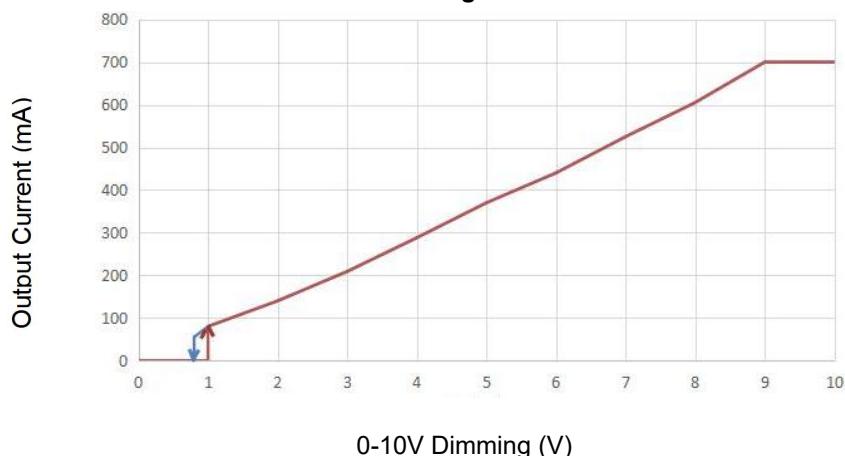


Input: 230Vac; output: 214Vdc/700mA (this data is measured by Lifud 0-10V dimmer and the chart is for reference only)

PWM Dimming Operation

- Connect PWM signal to the DIM terminal.
- Dimming depth: 10% (typical value)
- Compatible signal range: 1000-2000(Hz), amplitude: 9-10(V)
- DIM+/- (without signal connected): 100% rated current

Wiring Diagram of PWM Dimming

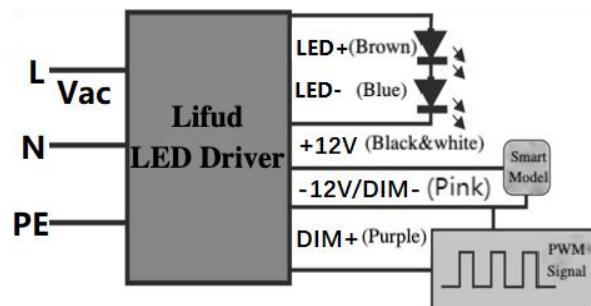

This diagram is only for A version; C version has no 12V+.

Dimming Curve




Input: 230Vac; output: 214Vdc/700mA (this data is measured by Lifud PWM signal generator Tektronix and the chart is for reference only)

Rx Dimming Operation


- Connect Rx signal to the DIM terminal.
- Range: 0-100KΩ
- Dimming depth: 10% (typical value)
- DIM+/- (without signal connected): 100% rated current

Wiring Diagram of Rx Dimming

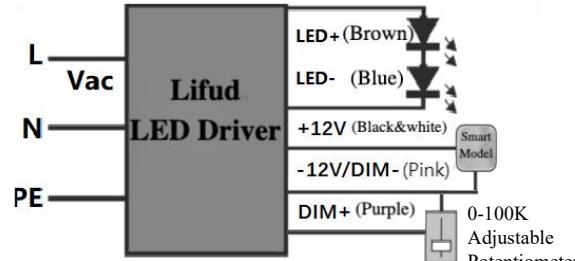

This diagram is only for A version; C version has no 12V+.

Dimming Curve

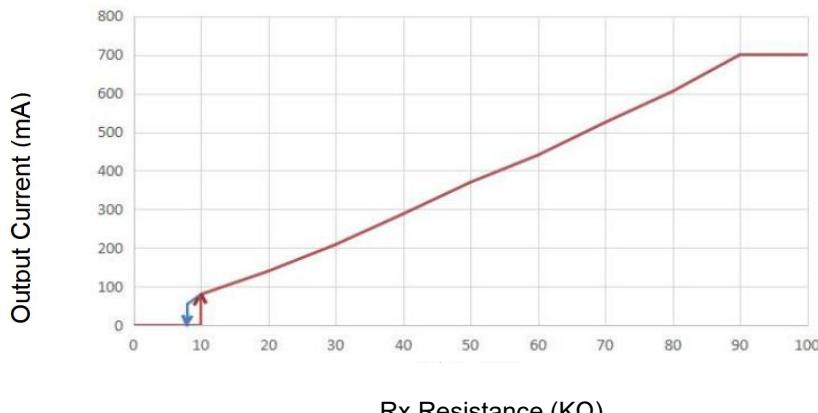


Input: 230Vac; output: 214Vdc/700mA (this data is measured by resistance dimmer and the chart is for reference only)

Programmer tools and software


Product	Name	Brand	Model	Software
	Lifud programmer	LIFUD	LF-SCS080C	LF-PRG

Wiring diagram of parameter setting

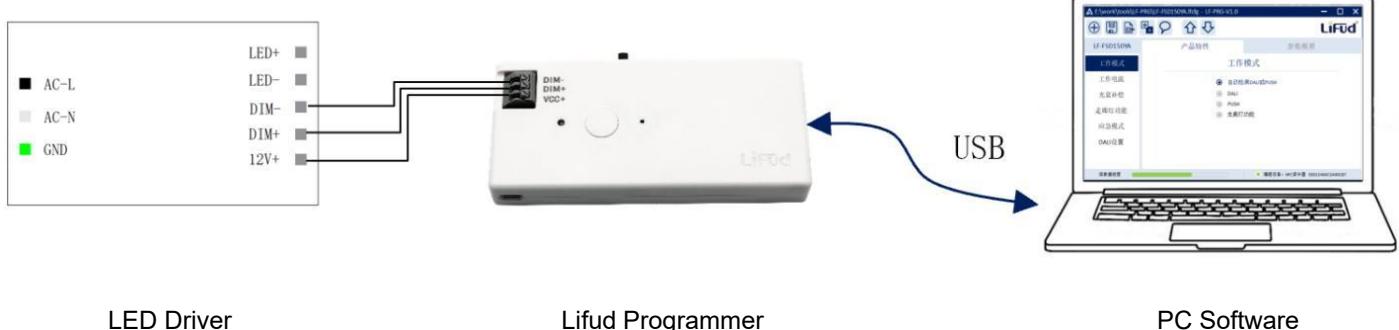


Time dimming function

Time dimming mode: there are 6 steps in total. You can set the brightness of each step and the operating time of the first to fifth steps.

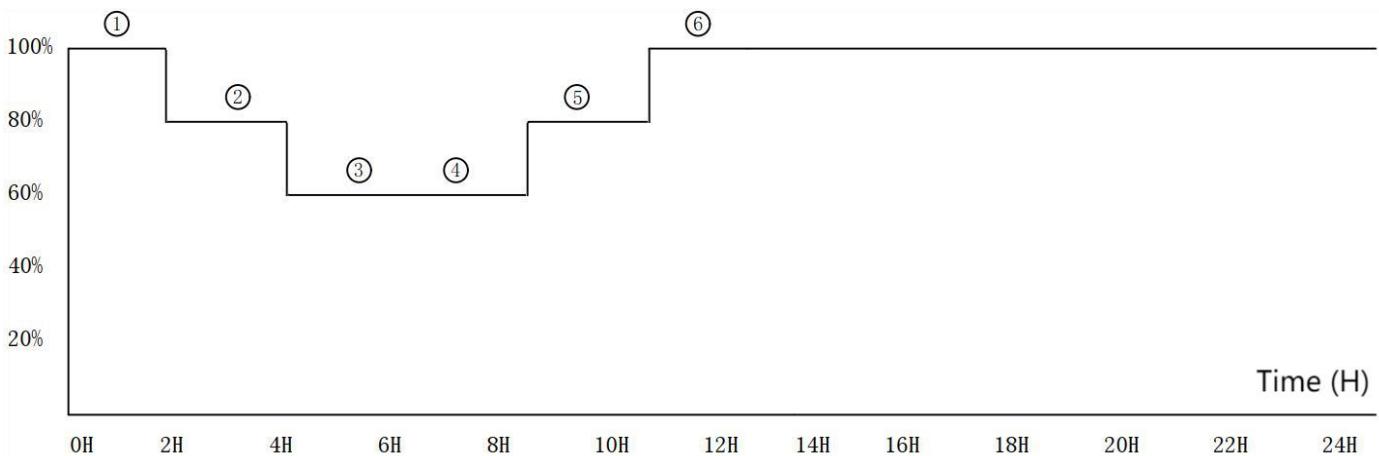

Note: In the time dimming mode, after the LED driver is powered on, it will work according to the set dimming curve.

Dimensions

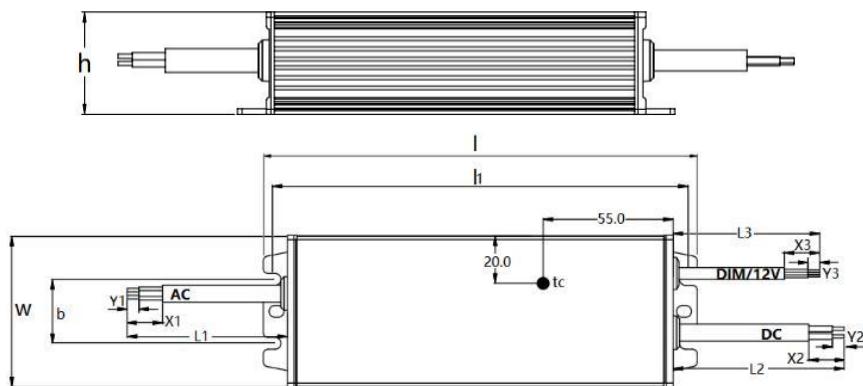

Note: this diagram is a front view and Tc point is on the front side of the driver.

Mounting hole spacing, length	173.6mm
Mounting hole spacing, width	27mm
Product weight	815g
Wire type, input side	3*1.0mm ² Ø8.2±1mm
Wire type, output side	2*1.0mm ² Ø7.7±1mm
Wire type, dimming and AUX side	3*22AWG Ø5.0±0.2mm
Wire color, input side	AC-L Brown; AC-N Blue; PE Yellow&green
Wire color, output side	LED+ Brown; LED- Blue
Wire color, dimming and AUX side (only for A version, C version has no 12V wires)	DIM+ Purple; DIM- Pink; +12V Black&white
Wire length, input side (L1)	270±10mm
Wire length, output side (L2)	220±10mm
Wire length, dimming and AUX side (L3)	220±10mm
Wire peeled length, input side (X1)	40±4mm
Wire peeled length, output side (X2)	36±4mm
Wire peeled length, dimming and AUX side (X3)	60±5mm
Wire tinned length, input side (Y1)	10±1.5mm
Wire tinned length, output side (Y2)	8±1.5mm
Wire tinned length, dimming and AUX side (Y3)	10±1.5mm
Length (l)	183.6±0.5mm
Width (w)	64.2±0.5mm
Height (h)	38±0.5mm

Colors & materials

Casing material	Metal
Casing color	Silver gray

Temperature & operating conditions

Ambient temperature range	-40°C - +60°C
Maximum temperature at Tc test point	90°C
Temperature range at storage	-40°C - +80°C (6 months in Class I environment)
Humidity range at storage	10-90%RH (no condensation)
Humidity during operation	20-90%RH
Atmospheric pressure	86-106KPa
RoHS	RoHS 2.0 (EU) 2015/863

Capabilities

Dimmable	0-10V/PWM/Rx dimmable
Open circuit protection	Open circuit voltage \leq 280Vdc
Over-temperature protection	When T_c is $95^{\circ}\text{C} \pm 5^{\circ}\text{C}$, it will reduce the current and auto-recover when the T_c decreases to the normal temperature.
Overload protection	/
Short circuit protection	The LED driver will not be damaged even in the state of short circuit for a long time. (Auto-recovery)
Max. cable length to lamp/LED module	/
Suitable for fixtures with prot. class	I
Control interface	/
Number of channels	1 channel

Programming

Programmer	LF-SCS080C
DALI control software	/
APP	LF-PRG

Certificates & standards

Approval marks – approval	ENEC, CE, CB, RCM, SAA
Standards	IEC/EN 61347-2-13, IEC/EN 61347-1, IEC/EN 62493 IEC/EN 62384, AS 61347.1, AS 61347.2.13
EMC	EN 55015, EN 61547, EN 61000-3-2,3
Group pulse	5kV (Class B)
ESD	Air 8kV, touch 4kV
Type of protection	IP67

Logistical data

Product	Packaging unit (Pieces/Unit)	Dimensions (L*W*H)	Volume	Gross weight
LF-A1-150H105A/C	12	446mm*332mm*167mm	24.73dm ³	11.3kg \pm 5%

Test equipment & condition

Test equipment	AC power source: CHROMA6530, digital power meter: CHROMA66205, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber; lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, EEC SE7440, flicker tester (flicker-free coefficient test) Everfine LFA-3000, etc.
-----------------------	---

If there are no special remarks, the above parameters are tested at the ambient temperature of 25°C, humidity of 50%, maximum output power and input voltage of 230Vac/50Hz.

Additional information

1. It is recommended that user install the over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.
2. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirmed the EMC of the whole light fixture before the whole light fixture is finished.
3. The number of LED drivers that can be connected to a circuit breaker and the inrush current are tested under the same conditions.
4. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.
5. When using the LED driver, please pay attention that the total output power should not exceed the maximum rated output power, otherwise the warranty service of LED driver will fail.
6. When conducting withstanding voltage test on LED driver, please short-circuit the input wire L and N; the positive electrode and negative electrode of the output wire; the positive electrode and negative electrode of the dimming wire and AUX power supply.

Transportation & storage

Suitable transportation means: vehicles, boats and aeroplanes.

In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact on LED driver as much as possible.

The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

Cautions

Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.

Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.

Man-made damage is beyond the scope of Lifud warranty service.

Disclaimer

Subject to change without notice. Errors and omissions excepted. Always make sure to use the most recent release.

Lifud Technology Co., Ltd. reserves the right to interpret any content of this specification.