



# EHP-175X50-12-40-70-LS50-06

New Experience Of Lighting

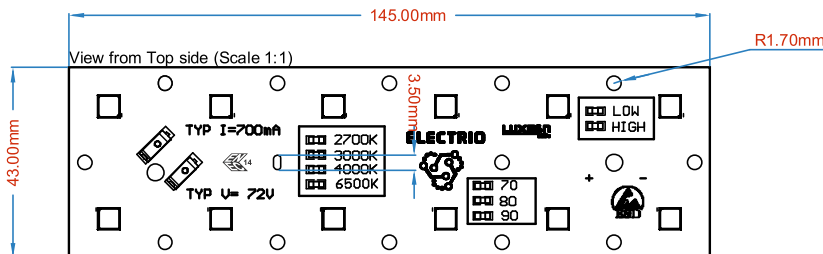

- Lumileds Luxeon 5050 Square
- Constant Color, MacAdams Step 3
- Substrate: Alu
- PCB Thickness: 1.6 mm
- Copper Weight: 35µm
- Surface Treatment: HASL
- Thermal Conductivity: 1.5W/mk
- Breakdown Voltage: 2000V
- Wago 2059-301/998-403 1 pole mini connector
- CTI 600V

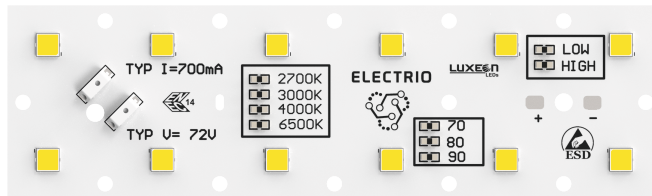

## Electrical Specification

Product Code	Colour	Luminous Flux TC:25°C	Forward Voltage Flux	Serial	Parallel	Power Consumption TC:25°C	Efficacy TC: 25°C	CRI
	(k)	(lm)	(v)			(w)	(lm/w)	
Operation Mode at 350 mA								
EHP-175X50-12-40-70-LS50-06	4000	4623	67.92	12	1	23.77	194.47	70

\*\*These values are estimated.

