
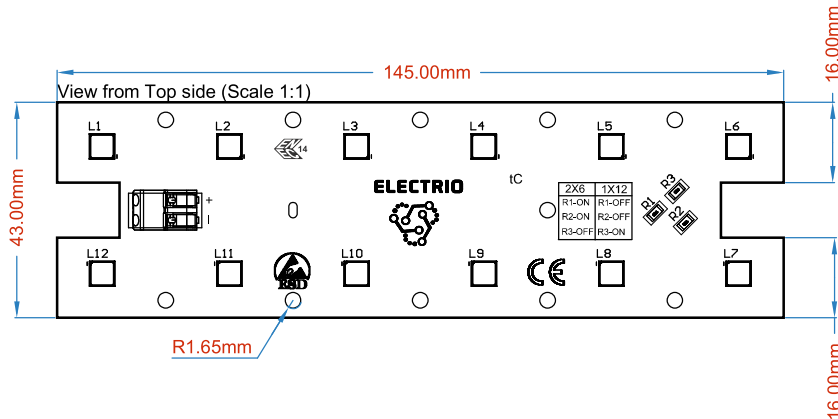


EHP-145X43-26-40-70-LS50-06

New Exprience Of Lighting

- Lumileds Luxeon 5050 Square
- Constant Color,MacAdams Step 3
- Substrate:Alu
- PCB Thickness:1.6 mm
- Copper Weight:35µm
- Surface Treatment:HASL
- Thermal Conductivity:1.5W/mk
- Breakdown Voltage:2000V
- Wago 2060-452/998-404 2 pole connector
- CTI 600V

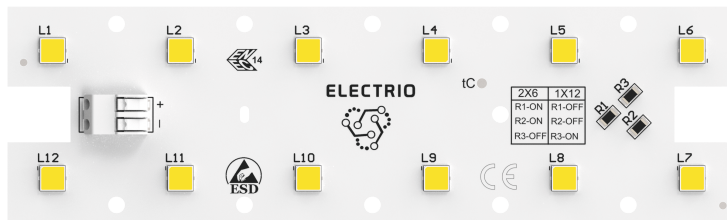

Electrical Specification

Product Code	Colour	Luminous Flux TC:25°C	Forward Voltage Flux	Serial	Parallel	Power Consumption TC:25°C	Efficacy TC: 25°C	CRI
	(k)	(lm)	(v)			(w)	(lm/w)	(Ra)
Operation Mode at 700 mA								
EHP-145X43-26-40-70-LS50-06	4000	4623	33.96	6	2	23.77	194.46	70

**These values are estimated.

