


EMERGENCY LIGHTING

ELCEM81L/H

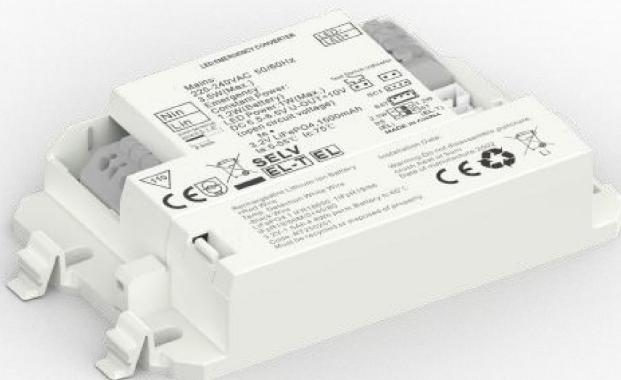

Features


- For LED module with a forward voltage of 5.5-6.5Vdc
- Communication function with extended wireless module
- ELCEM81 is SELV output voltage
- Plug-in Lithium Iron Phosphate battery
- Constant power output, output current self-adjustable
- Automatic shutdown of output if LED load is out of range
- 5 years guarantee electronic

Functions

- Maintained/Non-maintained operation
- Standard and self-test function
- Products can switch the self testing,standard function through the dial switch
- Electronic charge system
- Deep discharge protection
- Short-circuit-proof battery connection
- Open-circuit-proof
- Polarity reversal protection for battery



Dimensions

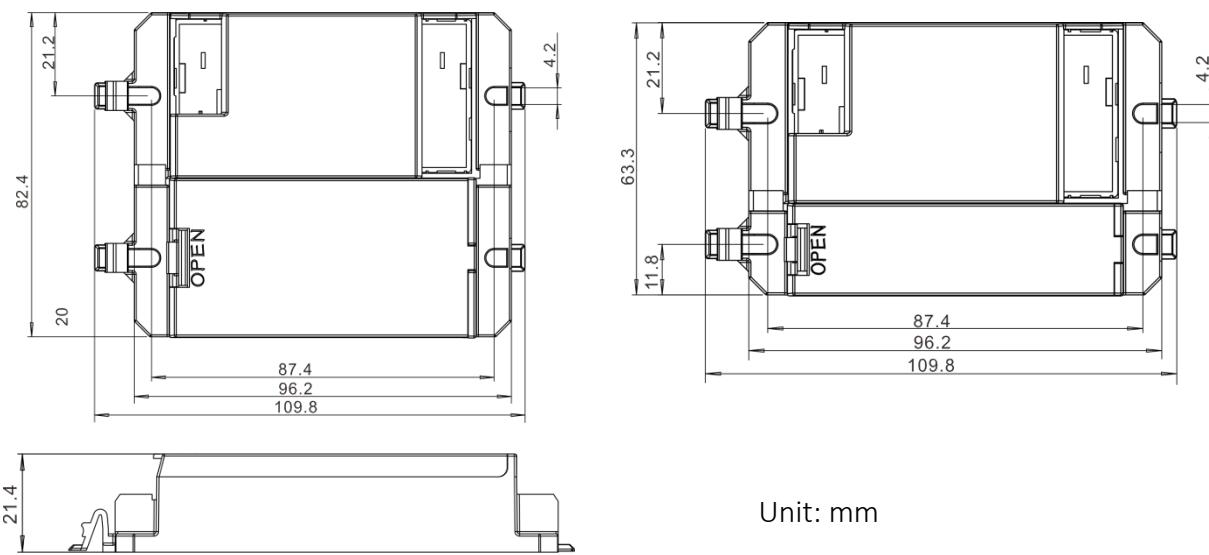

Item Code	Carton size	QTY	Weight per pc.	Battery
81-BS/ST-1.2W-1H 81-BS/ST-1.2W-3H 81-BS/ST-2.5W-1H Single battery compartment series	380*250*170	35PCS	120g	18650 1 cell
81-BS/ST-2.5W-3H Side-by-side battery compartment series	380*250*170	35PCS	160g	18650 2 cells

EMERGENCY LIGHTING

ELCEM81L/H

Technical Data

Rated supply voltage	220-240VAC
AC voltage range	144-187VAC
Mains frequency	50/60Hz
Power factor	≥0.5
Starting time	1s
Output overvoltage protection	10V
U-OUT(including open-/short-circuit and double load) U-OUT	10V
Ambient temperature ta	5-55°C
Max. Casing temperature tc	75°C
IP rating	IP20
In-rush current	3A
In-rush current duration	3.5ms
Mains surge capability (between L – N)	1KV
Maximum withstand voltage	2KV+4U
Withstand time	60s

Item Code	Typical output emergency power	Mains input current, min	Mains input current, max	Input power in mains operation, min/	Input power in mains operation, max
ELCEM81-BS/ST	1.2W	0mA	30mA	0W	3.5W
	2.5W				

Item Code	LED module forward voltage range Min-Typ-Max	LED module forward current range Min-Max	LED module forward power range Min-Max
ELCEM81-BS/ST-1.2W	5.5-6-6.5V	110-180mA	0.7-1W
ELCEM81-BS/ST-2.5W		230-350mA	1.5-1.95W

Note:

- 1.All specifications are typical at 25°C unless otherwise stated.
- 2.All specifications are typical on the 230VAC unless otherwise stated.

EMERGENCY LIGHTING

ELCEM81L/H

Functionality of the test button

- 1) A short press (>1s) on the button start a function test lasting 5 seconds (The battery's capacity should be more than 5%=charging 30mins)
- 2) Holding down the button(>10s) resets the timer(System-reset)

Function test

The 5 second long, each 7 days' function test serves to check the functionality of the emergency unit, the batteries and LED module.

Duration test(Europe)

- First test: After 24 hours of AC mains power input, the emergency lighting unit will enter into a 3-hour duration test.
- Half year duration test: Conduct 3-hour duration test every 180-182 days to check the battery capacity.

Notice.

- A function test&duration test shall only be started when the battery supply is fully charge if a mains supply failure occurs while a function test& duration test is in progress, the test shall be postponed and the system shall enter emergency operation. Following restoration of the mains supply , a postponed duration test shall re-commence automatically when the battery supply is fully re-charge, function test bettery \geq 3V,duration test bettery \geq 3.55V
- The indicator will be slow flashing Green within 5 days if the duration test be carried out successfully.

LED Indication	Status	Description
Permanent Green	Standby ,System OK	Mains Operation ,battery is charged
Fast flashing Green (0.25s on 0.25s off)	Function test underway	Function test underway
Slow flashing Green (1s on 1s off)	Duration test underway	Duration test underway
Permanent Red	Lamp failure	Open Circuit or Short circuit or LED failure
Fast flashing Red (0.25s on 0.25s off)	Battery capacity failure	Battery failed duration test
Slow flashing Red (1s on 1s off)	Battery fault	Incorrect battery voltage or Short circuit or Open Circuit
Green and Red off	Battery Operation	Emergency mode:Mains disconnected or Mains failure
Slow flashing Red (1s on 3s off)	Battery temperature error	When power on and battery temperature is above 55(± 2) $^{\circ}$ C or below 0(+2) $^{\circ}$ C

Notice

Fault status:

If an error is detected, the indicator LED will switch to RED. If the error has been corrected please re-connecting the battery after the mains power off, the indicator LED immediately will switch back to GREEN when mainspower on.

Notice

Battery failed duration test:


After an exchange of the battery and holding down the button (>10S) reset the timer, the indicator LED will switch to GREEN.

EMERGENCY LIGHTING

ELCEM81L/H

Wiring Diagram

U-OUT of the LED drive is 10V

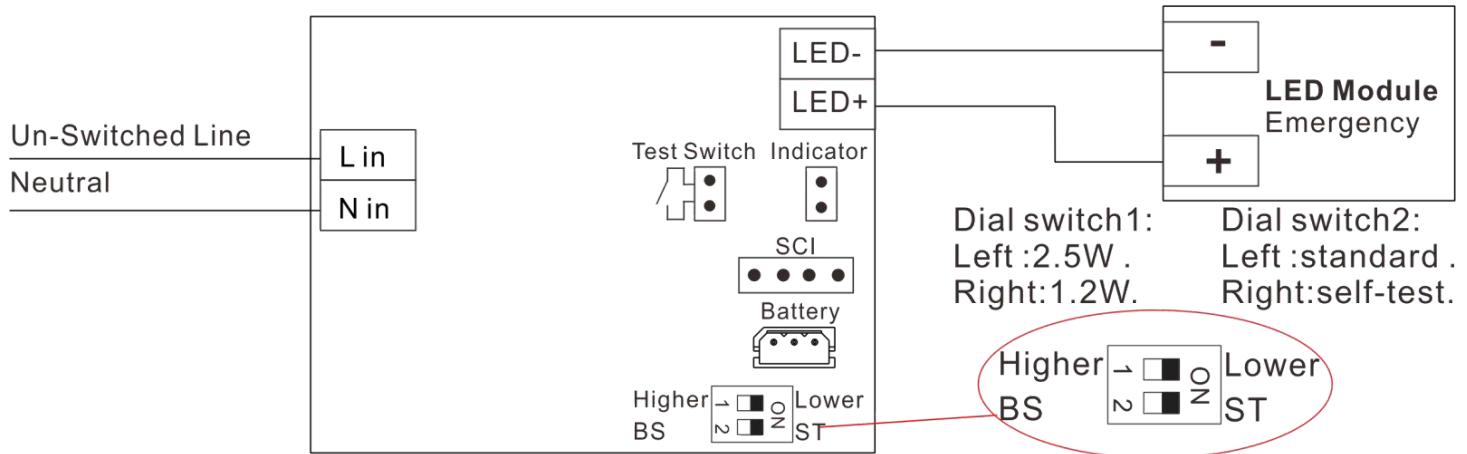

Notice:

With the following cases, the indicator will be off:

1. Mains power off, the light goes into emergency mode.

Requirements for LED Control gear:


1. The load voltage range is 5.5-6.5V

Note:

1. Please noted that functions switching by dial switch would only be available when all the wiring is disconnected, including the AC input, DC output and the battery.
2. SCI: SCI: This holder has a communication function for expanding the wireless modules.

Requirements for wiring wires:

1. Wire diameter range: 0.5-1.5 square millimeters;



EMERGENCY LIGHTING

ELCEM81L/H

Battery Data

Emergency power	Batteries	Emergency Duration	Battery discharge current Min-Typ-Max	Battery output power Min-Typ-Max	Battery fully charged time	Charge Current	Battery discharge voltage Min-Typ-Max			
ELCEM81-1.2W	18650/3.2V/1500mAhLiFePO4	1h	300-400mA	1-1.2-1.3W	24h	250-300mA	2.0-3.2-3.65V			
	18650/3.2V/1500mAhLiFePO4	3h								
ELCEM81-2.5W	18650/3.2V/1500mAhLiFePO4	1h	600-850mA	2.2-2.4-2.65W						
	18650/3.2V/3000mAhLiFePO4	3h								

Note:

Automatically charge when the voltage of a single battery drops below 3.4V. When the voltage of a single battery exceeds 3.65V, the charger turns off (0mA).

If the battery temperature is above 60 (± 2 °C) or below 0 (+2 °C), the battery will stop charging.

The emergency lighting LED driver will recharge the battery normally after running the test of 61347-2-7 CL22.3 (abnormal operating conditions).

When the voltage of a single battery is below min 2.0 V, the battery will not enter an emergency state.

The minimum charging environment temperature of the battery is 5°C, to ensure that the battery can be charged

Capacity	1.5/3.0Ah
International designation	IFpR 18/65
Battery voltage/cell	3.2V
Cell type	18650
Case temperature range to ensure	
4 years design life	+5°C to +55°C
5 years design life	+5°C to +45°C
6 years design life	+5°C to +35°C
Max. short term battery case temperature (shorter than 1 month over the battery lifetime)	70°C
Max. number discharge cycles	50 cycles total
Max. storage time	6 months

Notice: Storage condition

Batteries should be stored within the specified temperature range in low humidity conditions.

Optimal storage conditions are

- Temperature:-20°C to +40°C

- Humidity: 45%- 85%

Avoid atmosphere with corrosive gas

It is recommended to disconnect the battery before storage or delivery

Battery should be charged every three months in order to keep it's initial performance.

EMERGENCY LIGHTING

ELCEM81L/H

Standard

This product meets the following standards:

- EN IEC61347-2-7
- EN 61000-3-2
- EN 61547
- EN IEC61347-1
- EN IEC61347-2-13
- EN 61000-3-3
- EN 55015
- ROHS 2.0



Status indication bi-colour LED

Two-colour status display LED
Green:system OK,Red:fault
Plug connection
Opening size:6*6mm
Line length:12cm/23cm/50cm/1m/2m



Test switch

For connection to the emergency lighting unit
For checking the device function
Plug connection
Dielectric strength:500V AC for 60 seconds
Opening size:7.5*7.5mm
Line length:12cm/23cm/50cm/1m/2m



Test switch

For connection to the emergency lighting unit
For checking the device function
Plug connection
Dielectric strength:1KV AC for 60 seconds
Opening size:7.5*7.5mm
Line length:12cm/23cm/50cm/1m/2m




Test switch

For connection to the emergency lighting unit
For checking the device function
Plug connection
Dielectric strength:500V AC for 60 seconds
Opening size:12*12mm
Line length:12cm/23cm/50cm/1m/2m



Integrated waterproof button indicator light

For connection to the emergency lighting unit
For checking the device function
Plug connection
Dielectric strength:1000V AC for 60 seconds
Two-colour status display LED
Green:system OK,Red:fault
Opening size:12*12mm
Line length:12cm/23cm/50cm/1m/2m

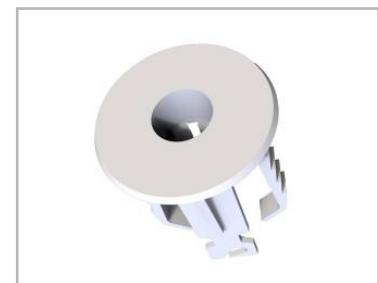

White indicator base

For fixation status indication bi-colour LED
Opening size:19*19mm

Battery extension cable

Cable length:
60mm/150mm/200mm/350mm
3-pole plug connection

EMERGENCY LIGHTING

ELCEM81L/H

Service Life

Average life-time 50,000 hours under rated conditions with a failure rate of less than 10% for the emergency converter as rated power.
Average failure rate of 0.2% per 1000 operating hours.

Important

The unit use dangerous mains voltage, it should be installed by qualified electricians only according to European safety standard or relevant nation regulations.

The emergency converter can only be used with the LED lamps and only suitable for use in indoors. Protect the electronics converter against excessive heat.

Connect the LED lamps to the emergency converter with correct polarity according to the schematic drawing.

The maximum length of the output cable to the LED lamps should not exceed 3m according to the EMC standard.

Connect the unit to AC power only after the wiring been completed between emergency converter and LED lamps.

About such situations, no ability can be taken over for possible damage: the emergency converter is used for purposes other than originally intended; connected in the wrong way.

Battery should be charged every three months in order to keep it's initial performance.

The emergency function test must be performed when a battery is fully charged for 24 hours.

The controlgear is not intended for use in luminaires for high-risk task area lighting.

The recharging device will recharge the battery ESSS normally after removal the short circuit link (S/C battery +/-) and reconnecting the ESSS.

The electric source for safety service is not a user serviceable item and shall only be replaced by the manufacturer service agent or a similar qualified person.

Insulation between battery circuits / indicator circuits / MT (ATS) circuits and normal supply fulfils reinforced insulation for all models.

Insulation between battery circuits / indicator circuits / MT (ATS) circuits and LED circuits fulfils reinforced insulation for all models.

If a LED driver is used with these control gears, The LED driver shall be in compliance with IEC/EN 61347-2-13 and shall provide double or reinforced insulation between input circuits and output circuits

For built-in convertors: rely upon the luminaire enclosure for protection against electric shock.

Test switch and indicator can only be used internally.

The controlgear relies upon the luminaire enclosure for protection against accidental contact with live parts.

The circuit is protected after a battery short circuit after the battery is restored, the charging circuit can charge normally.

The emergency converter is not proof against supply voltage polarity reversal.

The controlgear is suitable for use only on battery supply not having a trickle or intermittent re-charging circuits