
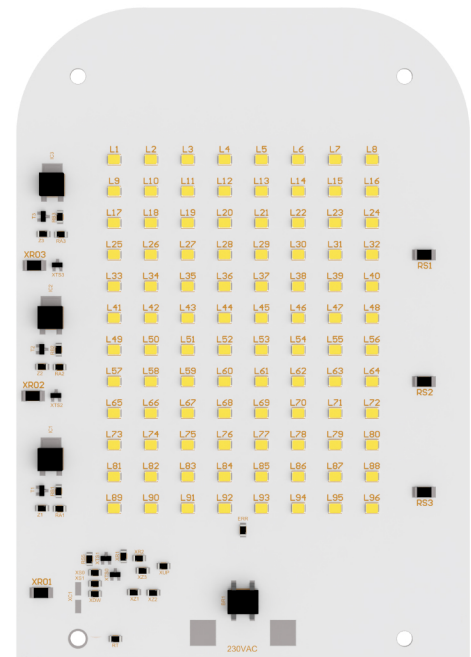


EL-125X180-3203-L128

New Expreience Of Lighting

- Lumileds 2835RB 6V
- Constant Color, MacAdams Step 3
- Substrate:ALU
- PCB Thickness: 1.6 mm
- Copper Weight:35 μ m
- Surface Treatment:HASL
- Thermal Conductivity: 1W/mk
- Breakdown Voltage:2000V
- No Connector
- P5B52HP2 Mosfet
- DF10S 0.5A Diode
- BC817 Transistor
- Diode Zener 0.5W 7V5
- 100uF Capacitor
- Diode Zener 1W 100V DO214AC-BZG03C100TR
- 270V Zener DO-214AC SMA-BZG03C270TR
- Red Led 1206

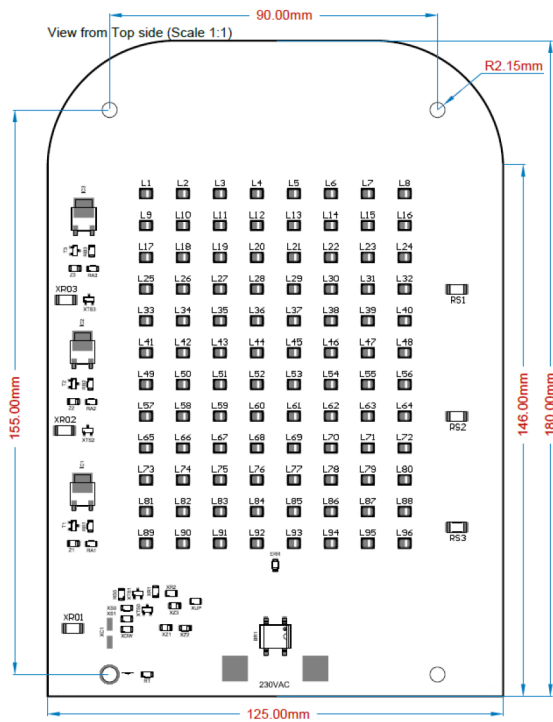

Electrical Specification

Product Code	Colour	Luminous Flux TC:25°C	Forward Voltage Flux TC:25°C	Serial	Parallel	Power Consumption TC:25°C	Efficacy TC:25°C	CRI
	(k)	(lm)	(VAC)			(w)	(lm/w)	(Ra)
EL-125X180-3203-L128	4000	13014	230.00	32	3	100.00	130.14	80

**These values are estimated.

